

Project Name:	Type:
Part Number:	Date:

FILAMENT DECORATIVE FAMILY

FEATURES

- Suitable to replace 11W, 25W, and 40W incandescent
- Vintage look fits all decorative applications
- Smooth dimming with existing installations*
- Comfortable warm diffused light
- Micro-designed driver - No heatsink required
- Most models suitable for wet location (see detailed specification table below), not suitable for use in totally enclosed fixtures
- Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
- Lamp ambient temperature: -4°F to 104°F (-20°C to 40°C)
- Rated Lifetime (L70): 15,000hrs
- 3 year limited warranty



SPECIFICATIONS


Product	Model	Equiv.	CCT	Finish	Wattage (W)	Lumens (LM)	Efficacy (LPW)	Power Factor	Input Voltage	CRI	Dim.*	UL Location	Fixture Rating	ES/T20
98457	1FS14/827	11W	2700K	Clear	1	55	55	0.7	120V	82	No	Wet	Non-Enclosed	N.A. / N.A.
98458	1FS14/820/A	11W	2000K	Amber	1	35	35	0.7	120V	82	No	Wet	Non-Enclosed	N.A. / N.A.
98459	3FT6DIM/820/A	25W	2000K	Amber	3	110	37	0.7	120V	82	Yes	Wet	Non-Enclosed	N.A. / N.A.
57946	3.5FT10DIM/822/A	25W	2200K	Amber	3.5	250	71	0.7	120V	82	Yes	Damp	Non-Enclosed	N.A. / N.A.
98239	4FST19DIM/820/A	40W	2000K	Amber	4	300	75	0.7	120V	82	Yes	Wet	Non-Enclosed	N.A. / N.A.
98451	4FG16.5DIM/827	40W	2700K	Clear	4	350	88	0.7	120V	82	Yes	Wet	Non-Enclosed	N.A. / N.A.
98452	4FG16.5DIM/827/E26	40W	2700K	Clear	4	350	88	0.7	120V	82	Yes	Wet	Non-Enclosed	N.A. / N.A.
98453	4FG16.5DIM/820/A	40W	2000K	Amber	4	250	63	0.7	120V	82	Yes	Wet	Non-Enclosed	N.A. / N.A.
98378	4FG25DIM/820/A	40W	2000K	Amber	4	250	63	0.7	120V	82	Yes	Wet	Non-Enclosed	N.A. / N.A.
97826	4.5FG25DIM/827/SB	40W	2700K	Silver Bowl	4.5	400	89	0.7	120V	82	Yes	Damp	Non-Enclosed	N.A. / N.A.
98377	3.8FG25DIM/927	40W	2700K	Clear	3.8	350	92	0.7	120V	92	Yes	Wet	Non-Enclosed	√ / √
57945	5FG40DIM/827	40W	2700K	Clear	5	470	94	0.7	120V	82	Yes	Damp	Non-Enclosed	√ / N.A.

*This lamp might not be compatible with all dimmers. Please visit www.greencreative.com for compatibility information.



FILAMENT DECORATIVE FAMILY

DIMENSION & WEIGHT

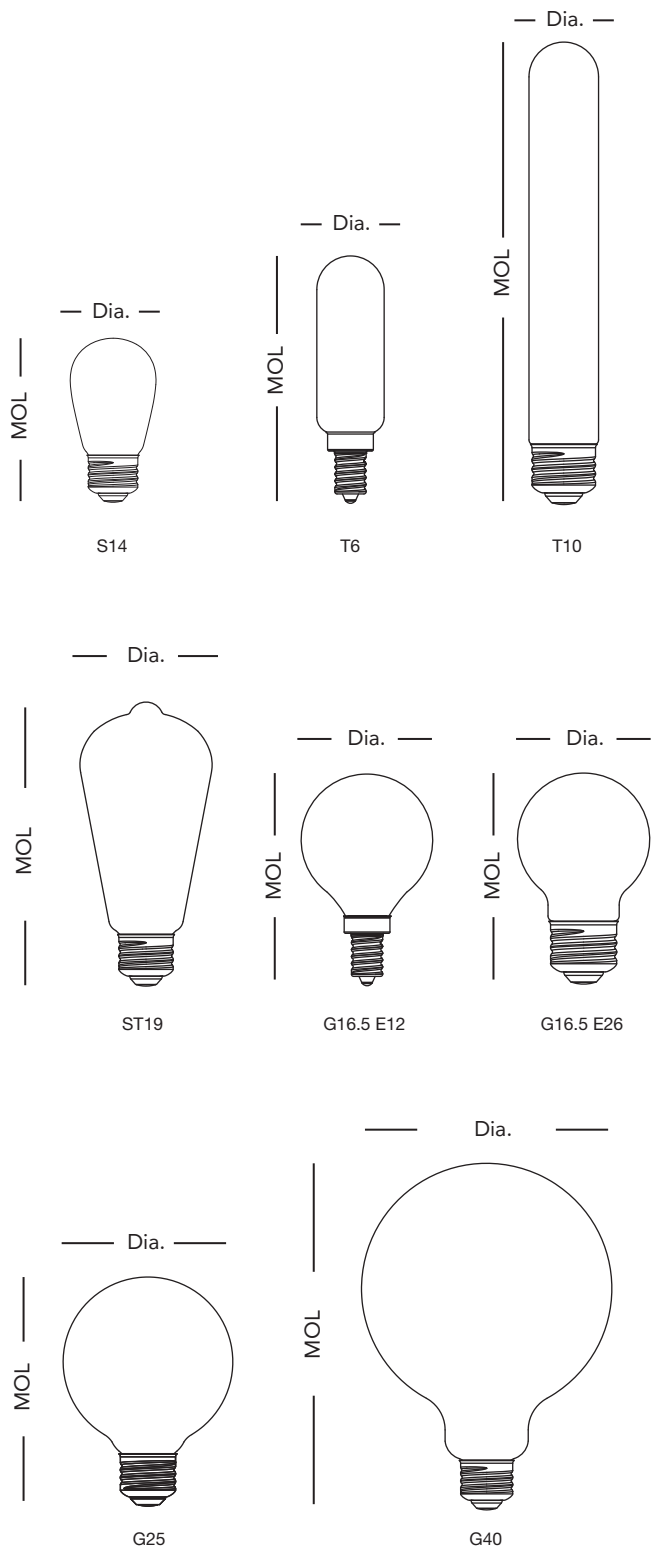

Model	Base	MOL	Dia.	Weight
41FS14/827	E26	3-3/8"	1-3/4"	0.03lb
1FS14/820/A	E26	3-3/8"	1-3/4"	0.04lb
3FT6DIM/820/A	E12	3-9/16"	1"	0.03lb
3.5FT10DIM/822/A	E26	7-1/2"	1-1/8"	0.1lb
4FST19DIM/820/A	E26	5-3/8"	2-1/2"	0.1lb
4FG16.5DIM/827	E12	3-3/16"	2"	0.04lb
4FG16.5DIM/827/E26	E26	3-1/4"	2-1/16"	0.04lb
4FG16.5DIM/820/A	E12	3-3/16"	2"	0.04lb
4FG25DIM/820/A	E26	4-5/8"	3-1/8"	0.09lb
4.5FG25DIM/827/SB	E26	4-7/16"	3-1/8"	0.11lb
3.8FG25DIM/927	E26	4-5/16"	3-1/8"	0.09lb
5FG40DIM/827	E26	6-1/2"	4-15/16"	0.22lb