

## Surge Strip Protection Device - Surge Protective Device, Point-of-use strip, White, 3-Mode, 4 Outlets, 125 VAC, Type 3, Connected Equipment Warranty 5 yr \$10,000

Item IG112463



### PRODUCT DESCRIPTION

Type 3 Point-of-Use Surge Protective Devices (SPD) are designed for heavy industrial use with 3 modes of surge protection (L-N, L-G, N-G). Features a 15 A resettable breaker and #14 AWG SJT power cord with molded plug. CSA certified to ANSI/UL 1449, 3rd Edition.

### FEATURES

- ▶ Three Modes of protection
- ▶ Metal Oxide Varistor (MOV) surge protection technology
- ▶ 15 A resettable breaker
- ▶ #14 AWG SJT power cord with molded plug
- ▶ Six foot cord length with four outlets
- ▶ LED protection indicator
- ▶ Extruded aluminum housing
- ▶ White
- ▶ Illuminating ON/OFF Switch
- ▶ 5-year product warranty

### APPLICATIONS

- ▶ Surge Protection

### TECHNICAL DATA

#### General

|                                     |  |
|-------------------------------------|--|
| Model Number                        | IG112463   |
| Description                         | Surge Protective Device, Point-of-use strip, White, 3-Mode, 4 Outlets, 125 VAC, Type 3, Connected Equipment Warranty 5 yr \$10,000 |
| UPC Code                            | 078275124530   |
| Brand                               | Intermatic   |
| Country of Origin (Intermatic)      | MEXICO   |
| Warranty Period                     | 5-Year limited   |
| Connected Equipment Warranty Period | 5-Year   |
| Surge Protection Type               | 3  |

#### Control Specifications

|                               |     |
|-------------------------------|-----|
| Has Illuminated ON/OFF Switch | Yes |
|-------------------------------|-----|

#### Mechanical Specifications

|                   |   |
|-------------------|---|
| Number of Outlets | 4 |
|-------------------|---|

#### Dimensions

|                                   |                           |
|-----------------------------------|---------------------------|
| Product Dimensions (H x W x D) in | 1 7/8 x 1 7/8 x 9 9/16 in |
| Cord Length (ft)                  | 6                         |
| Cord Length (m)                   | 1.828                     |

#### Material Specifications

|       |       |
|-------|-------|
| Color | White |
|-------|-------|

**Electrical Specifications**

|  |      |
|--|------|
| Maximum Continuous Operating Voltage (L-G) | 130  |
| Maximum Continuous Operating Voltage (L-N) | 130  |
| Maximum Continuous Operating Voltage (N-G) | 130  |
| Voltage Protection Rating (L-N)            | 700  |
| Circuit Breaker Amperage                   | 15 A |
| Voltage Protection Rating (L-G)            | 600  |
| Surge Protection Technology                | MOV  |
| Voltage Protection Rating (N-G)            | 600  |

**Packaging**

|                                       |                     |
|---------------------------------------|---------------------|
| Shipping Weight (lbs)                 | 1.846               |
| Unit Carton Dimensions (H x W x L) in | 3.25 x 5 x 10.75 in |


**Environmental Specifications**

|                         |                                     |
|-------------------------|-------------------------------------|
| Temperature (operation) | -4 °F to 104 °F / (-20 °C to 40 °C) |
|-------------------------|-------------------------------------|

**Standards and Certifications**

|                           |                          |
|---------------------------|--------------------------|
| CSA Certification         | cCSAus                   |
| UL Standard               | Ansi/UL 1449 3rd Edition |
| California Proposition 65 | DEHP                     |

**DRAWINGS AND DIAGRAMS**

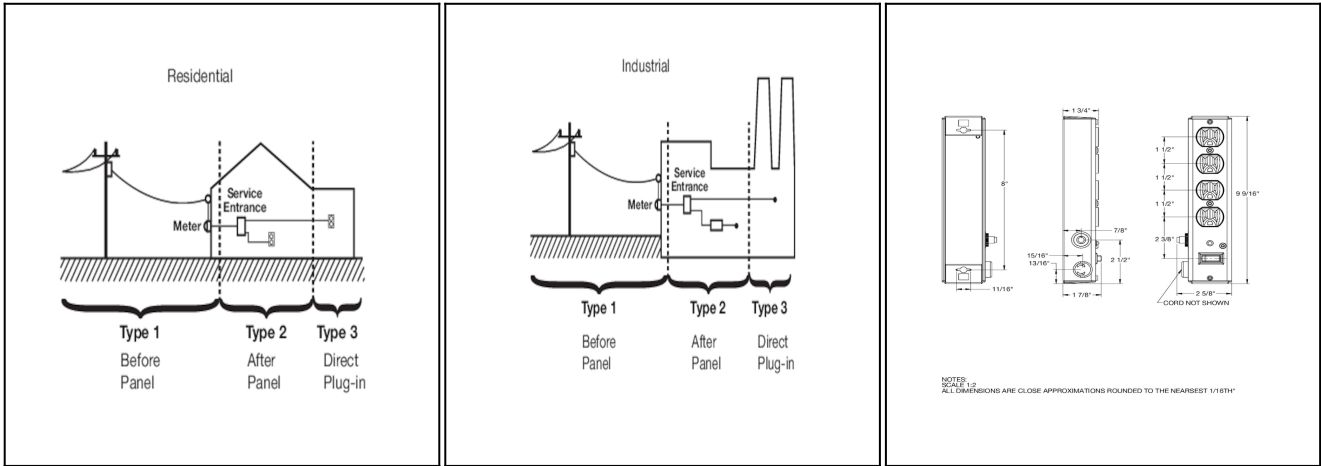

---

## ACCESSORIES



24EG5133

Mounting Bracket Plate for Type 3 SPD Surge Strips