



#### **NEONFLEX PRO-L RGBW**

Featuring multiple power feed options, in-field customization makes for a versatile option for any interior or exterior application. See Page 8

## **TABLE OF CONTENT**

When you need lightAmerican Lighting	4
LED 5 Complete Omni Slim 3CCT Puck Series	
NEONFLEX PRO-L RGBW	8
Trulux™ RGBW High Output IP 65 Tape Light	9



LED 5 Complete
This adaptable, adjustable fixture allows for a wide range of illuminated area regardless of installation location. See Page 5




Omni Slim 3CCT Puck Series
As versatile as it is sleek. Adjustable between
2700K, 3000K, 4000K as well as a black or white finish options. See Page 6



#### **NEONFLEX PRO-V RGBW**

The next generation solution for achieving seamless lines of direct view lighting for any architectural-grade install. UV, flame, and saltwater resistant, Neonflex Pro is not only durable, but easy to install. See Page 7

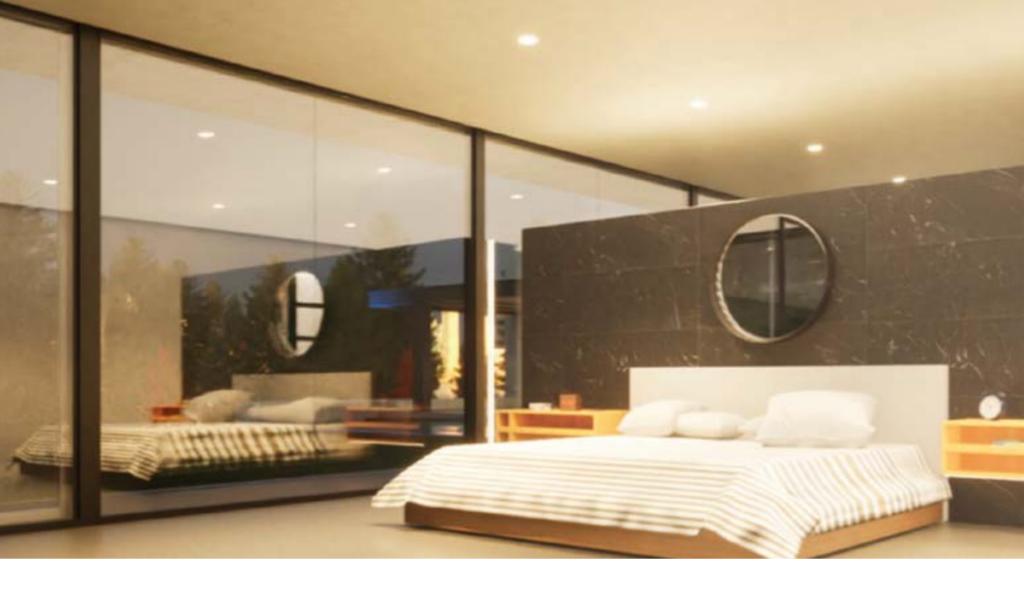


# When you need light... AMERICAN LIGHTING

Founded in 1989, American Lighting, Inc. manufactures a wide range of lighting solutions for your residential, commercial and specialty lighting needs. We pride ourselves in being a lighting solutions provider by offering our customers a broad line of innovative and high quality lighting products. Continued innovation is a core strategic initiative at American Lighting, and we are committed to developing new products by utilizing the latest lighting technologies and designs. We pledge to deliver superior customer service by employing and training a team of highly experienced lighting professionals.

American Lighting's knowledgeable and dedicated sales team is here to provide you with product information as well as answer any questions you may have.



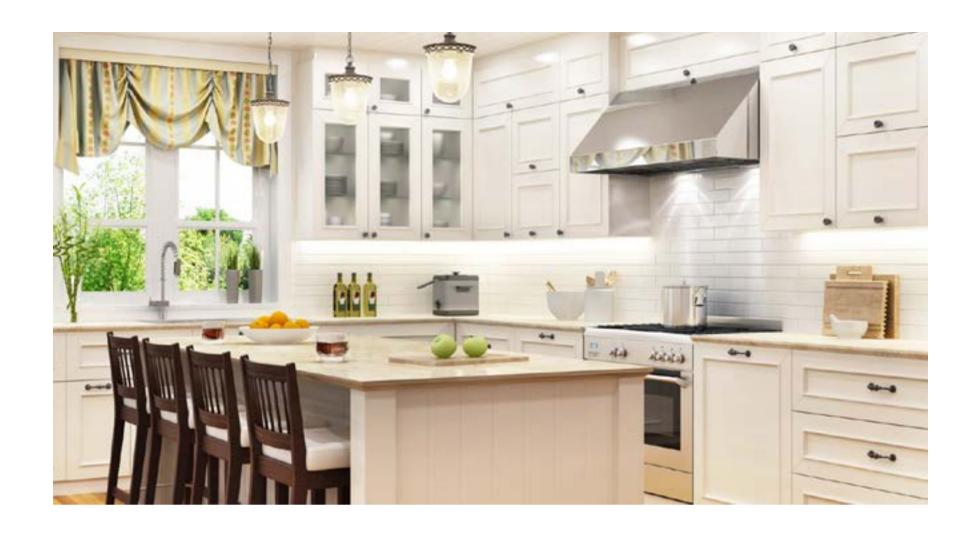

# LED 5 Complete

This adaptable, adjustable fixture allows for a wide range of illuminated area regardless of installation location. The fixture produces up to 1350 lumens and is field-switchable to five different color temperatures. With a pivot angle of ±32° the LED 5 Complete promises ultimate flexibility without compromising performance.

#### **Features**

- Available in field-switchable5CCT (2700K | 3000K | 3500K | 4000K | 5000K)
- High color rendering index of 90+ CRI
- 120V AC input
- Low power consumption not exceeding 16.5W
- Surface mount ultra-low profile
- 35,000 hour rated life
- cETLus listed for dry locations

**SHOP NOW** 



## **Omni Slim 3CCT Puck Series**


The ultra low profile Omni Slim puck light is only 1/16" tall (1/4" with trim) but produces up to 170 lumens. Available in 3000K or 4000K with a black or white finish the Omni Slim is the task light that is perfect for any accent, under-cabinet, in-cabinet, and other small niche area lighting application.



## **Features**

Adjustable CCT: 2700K - 3000K - 4000K
High color rendering index (90+ CRI)
24V DC operation
Low power consumption of 4W
Surface mount or recessed mount application
cETLus listed for dry locations
35,000 hour rated life

## **NEONFLEX PRO-V RGBW**

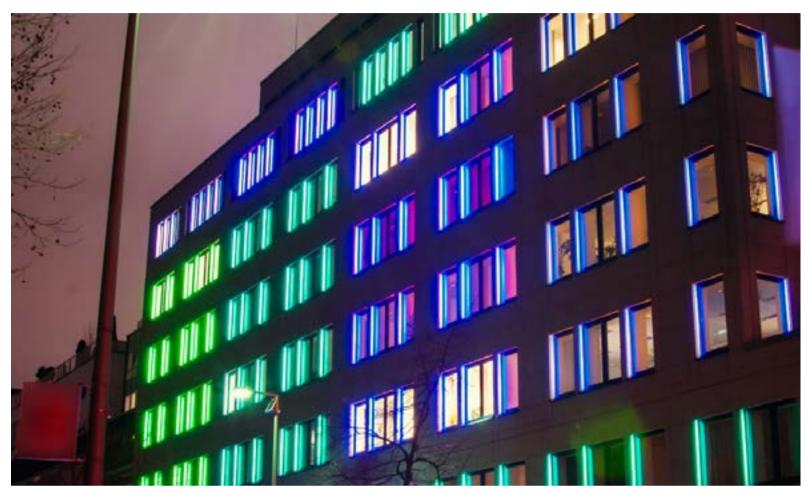

Neonflex Pro is the next generation solution for achieving seamless lines of direct view lighting for any architectural-grade install. UV, flame, and saltwater resistant, Neonflex Pro is not only durable, but easy to install. Featuring multiple power feed options, in-field customization makes for a versatile option for any interior or exterior application.

#### **Features**

RGBW vertical (top bend) LED neon
Lumen output up to 134Lm per foot
Consumes up to 4.57W per foot
Cuttable every 2.46" with 16.4ft max run
Quick install field connections: Front, Side, and Bottom feeds
UV, flame, and saltwater resistant
IP67 rating featuring sealed silicone jacketing
Dimmable (5-100%) with most DMX controls
cULus Listed for indoor and outdoor wet locations
54,000 hours rated life



## **NEONFLEX PRO-L RGBW**

Neonflex Pro is the next generation solution for achieving seamless lines of direct view lighting for any architectural-grade install. UV, flame, and saltwater resistant, Neonflex Pro is not only durable, but easy to install.

Featuring multiple power feed options, in-field customization makes for a versatile option for any interior or exterior application.

### **Features**

RGBW lateral (side bend) LED neon
Lumen output up to 97Lm per foot
Consumes up to 4.57W per foot
Cuttable every 2.46" (62.5mm) with 16.4ft (5m) max run
Quick install field connections: Front, Side, and Bottom
feeds

UV, flame, and saltwater resistant
IP67 rating featuring sealed silicone jacketing
Dimmable (0-100%) with most DMX controls
cULus Listed for indoor and outdoor wet locations
54,000 hours rated life

Available CCT/Colors



Dimming Options

• (0-100%) with most DMX controls

Listing / Ratings












# Trulux<sup>™</sup> RGBW High Output IP 65 Tape Light



Alternating 3-in-I LEDs with 3000K warm white LEDs provide a dynamic color range that extends passed traditional RGB. RGBW lighting combines RGB with white color mixing to create millions of color possibilities while maintaining even greater brightness and overall color saturation.

### **Features**

Dynamic RGB + 3000K warm white color blending
Create millions of color combinations perfect for impactful installations
Excellent color rending (94+ CRI)
Consumes up to 4.4 watts per foot
Control via any RGBW (4-channel) controller
Run lengths up to 22 feet and cuttable every 6.56"

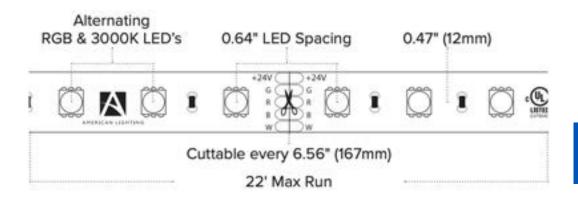

**SHOP NOW** 



Carmel, Indiana Phone: (317) 969-5337