


## OUTDOOR CEILING FIXTURE 157FM

## OUTDOOR DECORATIVE MARLEX®

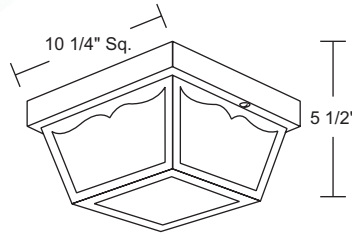

Wave Lighting's 157FM adds a contemporary look to any outdoor space. Wave Lighting's 156FM is designed for ceiling applications and mounting hardware is included. Options include photocell.

### LED SOURCE OPTIONS

#### LIGHTWAVE LED - LR/LT

- 120V, 50/60 Hz
- AC Driver-On-Board Array
- Estimated 50,000 Hrs L<sub>70</sub>
- Low Flicker (LT models)
- Surge Supression
- Dimmable (see compatible dimmer list)
- High Efficacy LED Light Source
- 3000K or 4000K CCT 80 or 90CRI
- 5 Year Warranty
- Energy Star

#### LED MULTI-VOLT SYSTEM - L22

- 120-277V, 50/60Hz
- Estimated 50,000 Hrs L<sub>70</sub>
- 4000K CCT 80CRI
- 3 Year Warranty

#### E26 MEDIUM BASE - LE26

- 120V, 50/60Hz
- "Screw-In" Medium Base A19/E26 LED Lamp
- Estimated 15,000 Hrs L<sub>70</sub>
- Low Flicker (3K models)
- Dimmable (see compatible dimmer list)
- 3000K CCT 90CRI or 4000K CCT 80CRI
- 3 Year Warranty
- Energy Star



### SPECIFICATIONS

- Black or White
- Mounting Hardware Included
- Frosted Polypropylene Diffuser
- Ceiling Mount Only
- Minimum Starting Temp -20°F
- UL Listed for Damp Locations
- Composite Construction

BK BLACK

WH WHITE



GUIDE CODE: 157FM-BK

CALL FOR PHOTOMETRIC INFORMATION

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
157FM	POLYPROPYLENE Frosted	<b>E26 MEDIUM BASE</b>	C-4K W-3K	BK-Black WH-White	O-Occupancy Sensor
		POLYCARBONATE BACK PAN (2) 60W MAX Medium Base <b>LE26-9.5W 800lm (E26 LED Lamp) + ★</b>			
		<b>120V LIGHTWAVE LED</b>			
		ALUMINUM BACK PAN <b>LR12-13W 1000lm 80CRI ★</b> <b>LR15-15W 1400lm 80CRI ★</b> <b>LR22-23W 1900lm 80CRI ★</b> <b>LT12-12W 1040lm 90CRI</b> <b>LT15-16W 1400lm 90CRI</b> <b>LT22-24W 2020lm 90CRI</b>			
		<b>120-277V MULTI-VOLT LED</b>			
		<b>L22-22W 1824lm</b>	4K		

+ Lamp included. ★ Energy Star qualified product.

REFER TO CATALOG FOR OPTION SPECIFICATIONS - Specifications subject to change without notice - FIXTURE SPEC 9/21